


CDR030038-SURFACE MOUNTED

TECHNICAL SPECIFICATION



Wall Light or Surface mounted downlight
IP65
Epistar SMD 2835 LED brand
3000K, / 4000K / 5000K
Colour deviation: SDCM ≤ 6

-TUV and SAA approved
-Power factor ≥ 0.92

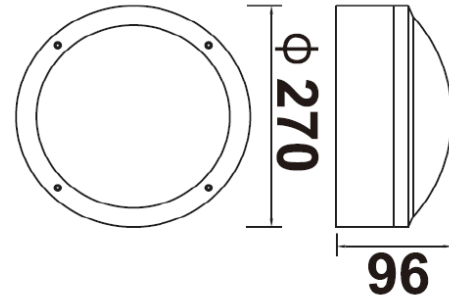

LUMINAIRE STRUCTURE

Material: Die-cast aluminium body in powder coated

Diffuser: Opal PC

Gasket: Silicone seal

Wattage: 25W

Lumen: 1760Lm (at 3000K)

Beam angle: 120°

Voltage: 220-24

