



Luminaire Structure

- Aluminium housing with oxidization solution
- Remote driver is included
- Long life span up to 50,000hrs

Body Color




Dull silver

Specification

Item Number:	SF120036-IP65
Light source:	2835 LED, Sanan Chips from Refond
Power:	36W
Size:	L1200 x W35 x H66mm
Installation:	Surface mounted
CCT:	3000/4000/6000K
Body Material:	Aluminum
Color Rendering Index:	80
Lumens:	3200lm
Operating Temperature:	-10~45°C
Input:	AC220~240V, 50/60Hz
IP Rate:	IP65
Driver:	Lifud

Size

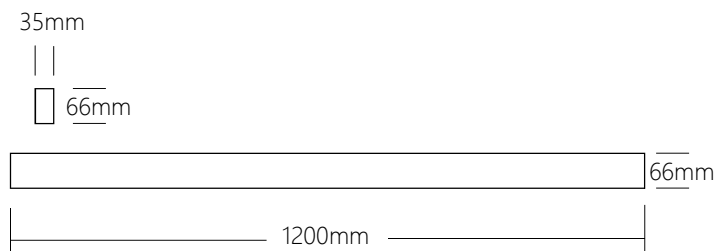

LED

Code: RF-PXXHI32DS-BF-N-Y

LED: 2835

Power: 231mW


Forward Current: 70mA

Reverse Voltage: 5V

Color Rendering Index: 80

Junction temperature: 110°

Manufactory: Refond



Driver

Code: LF-GMR040YE 0900H(U)

Power: 36W

Output Current: 900mA

Output Voltage: 27~40V

Input Voltage: AC 180~264V, 50/60Hz

Manufactory: Sichuan Ledfriend Technology Co., Ltd

