

Description



LT LEDLine Flex HB



TECHNICAL INFORMATION

<b>Total Power</b>	<b>14.4W/mtr.</b>
<b>CCT</b>	<b>2700K</b>
<b>Lumen Output</b>	<b>360Lm/mtr</b>
Optic	120° beam angle
Source	LED SMD
<b>Dimension</b>	<b>W6.5 x H12mm</b>
<b>Bending direction</b>	<b>Horizontal Bending</b>
<b>IP Rating</b>	<b>IP67</b>
Life time (L70)	50.000H


RoHS

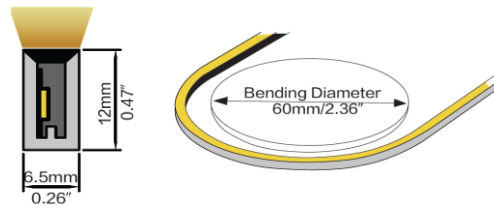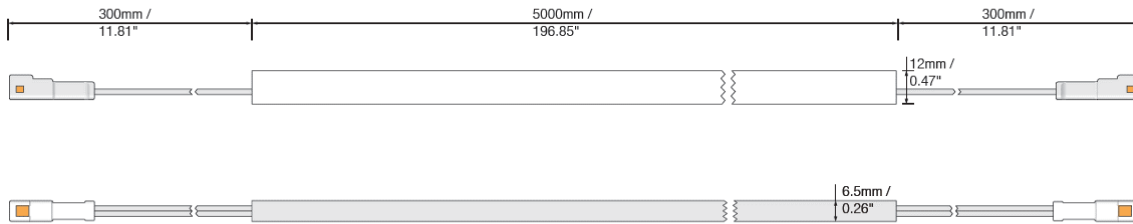

ELECTRICAL DATA

Voltage	DC24V (23.5Vmin, 24.5Vmax)
LED Pin Temperature	Max. 65.4°C/149°F
Storage Temperature	-25°C/-13°F <sub>min</sub> 60°C/140°F <sub>max</sub>
Ambient Temperature	T <sub>a min</sub> =25°C/-13°F, T <sub>a max</sub> =45°C/113°F at 8W
CRI	Ra90

BENDING DIRECTION

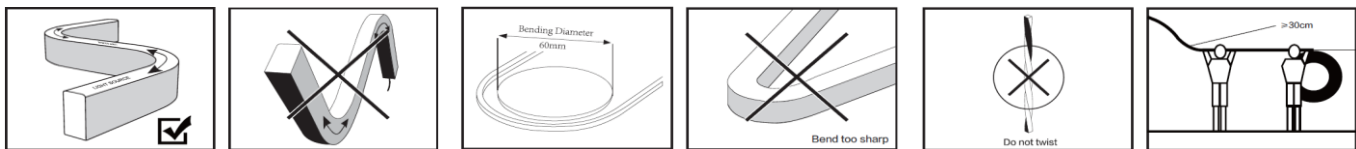

ACCESSORIES



Aluminium Profile  
Dimension: 1000x8.9x13.2mm/  
39.37"x0.35"x0.52" (LxWxH)  
Material: aluminium  
Color: silver



Curved Profile  
Dimension: 500x20.5x12mm/3  
9.37"x0.81"x0.47" (LxWxH)  
Material: stainless steel Color:  
silver



IP67 Connector -IQ  
Wire gauge: 0.33mm<sup>2</sup>/22AWG  
Protection: IP67 (Mated)



Mounting Clips  
Dimension: 15x8.1x10.3mm/  
0.59"x0.32"x0.41" (LxWxH)  
Material: stainless steel  
Color: silver  
Each meter of LED strip needs  
3 clips + 3 screws + 2 end caps

APPLICATION

- Designed to create an appropriate atmosphere by the color and light adjustment from 2700K to 5700K.
- Activate harmonious dynamic lighting scenes.
- Functional combined solution.