

Description



LT LEDLine Flex HB



TECHNICAL INFORMATION

Total Power	14.4W/mtr.
CCT	2700K
Lumen Output	360Lm/mtr
Optic	120° beam angle
Source	LED SMD
Dimension	W6.5 x H12mm
Bending direction	Horizontal Bending
IP Rating	IP67
Life time (L70)	50.000H


RoHS

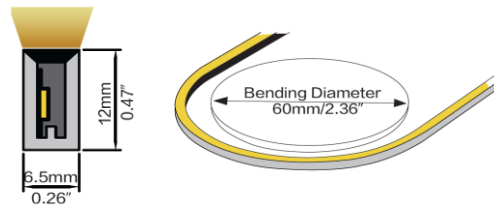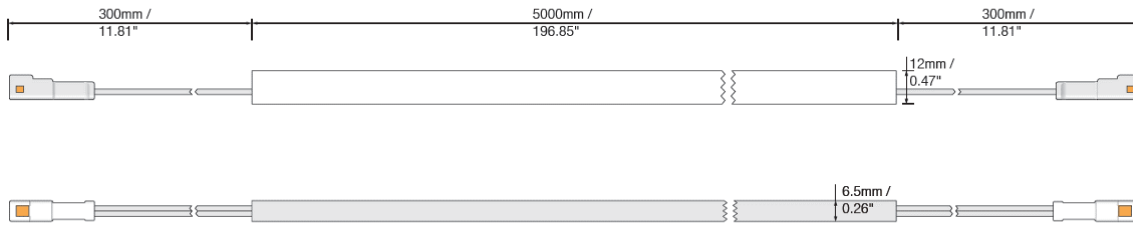

ELECTRICAL DATA

Voltage	DC24V (23.5Vmin, 24.5Vmax)
LED Pin Temperature	Max. 65.4°C/149°F
Storage Temperature	-25°C/-13°F _{min} 60°C/140°F _{max}
Ambient Temperature	T _{a min} =25°C/-13°F, T _{a max} =45°C/113°F at 8W
CRI	Ra90

BENDING DIRECTION

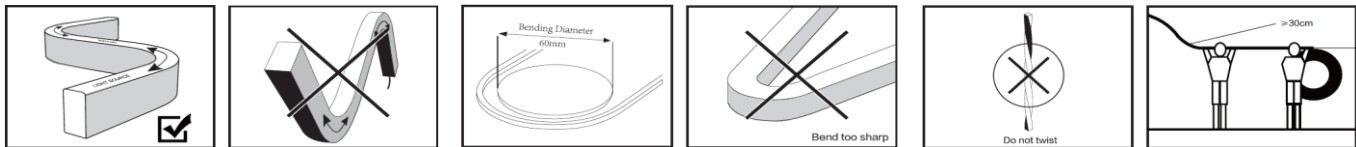

ACCESSORIES



Aluminium Profile
Dimension: 1000x8.9x13.2mm/
39.37"x0.35"x0.52" (LxWxH)
Material: aluminium
Color: silver



Curved Profile
Dimension: 500x20.5x12mm/3
9.37"x0.81"x0.47" (LxWxH)
Material: stainless steel Color:
silver



IP67 Connector -IQ
Wire gauge: 0.33mm²/22AWG
Protection: IP67 (Mated)



Mounting Clips
Dimension: 15x8.1x10.3mm/
0.59"x0.32"x0.41" (LxWxH)
Material: stainless steel
Color: silver
Each meter of LED strip needs
3 clips + 3 screws + 2 end caps

APPLICATION

- Designed to create an appropriate atmosphere by the color and light adjustment from 2700K to 5700K.
- Activate harmonious dynamic lighting scenes.
- Functional combined solution.